



# Cat<sup>®</sup> Bale Spears

SKID STEER LOADERS  
MULTI TERRAIN LOADERS  
COMPACT TRACK LOADERS  
COMPACT WHEEL LOADERS

Cat<sup>®</sup> Bale Spears are used for loading and carrying of both round and square baled materials in agricultural and landscaping applications. Offering optimal rigidity and capacity, the Bale Spear attachment is designed for a long working life.

## Features:

### Conical tapered tine

- A conically tapered tine minimizes the opportunity for the tine to cling within baled material. This design provides superior productivity when loading and carrying material. The forged tine is heat treated and made of high tensile strength steel for superior strength and durability.
- Bale Spear is secured to the rigid frame with a tapered bearing that ensures the security of the tine to frame. On the Single Bale Spear two additional stabilizer spears are located on the bottom of the frame, ensuring the security of the baled material when traveling and loading.

### Quick coupler

- Rugged, opposing edge design holds the work tool securely and allows the operator to quickly change from one high performance Cat Work Tool to another.

### Two lengths

- Two bale spear lengths are available for specific material handling requirements and operator preference.

### Heavy-duty high back structure

- Dual tine bale spear models are equipped with a heavy duty back rest that is durable, allows excellent visibility, and easy ingress and egress from the machine cab.

### Bolt-on step

- Bolt-on step provides safe and ergonomic access to machine cab that is easily replaceable if damaged.

## Compatibility

Model	Machines
<b>990 mm (39 in) Single Spear</b>	216B3, 226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C, 906M, 907M, 908M
<b>1245 mm (49 in) Single Spear</b>	216B3, 226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C, 906M, 907M, 908M
<b>990 mm (39 in) Dual Spear</b>	216B3, 226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C, 906M, 907M, 908M
<b>1245 mm (49 in) Dual Spear</b>	216B3, 226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C, 906M, 907M, 908M


Machine model availability and attachment vary by region. Please contact your local dealer for availability.




# Cat® Bale Spears

## Specifications

### Single Bale Spear

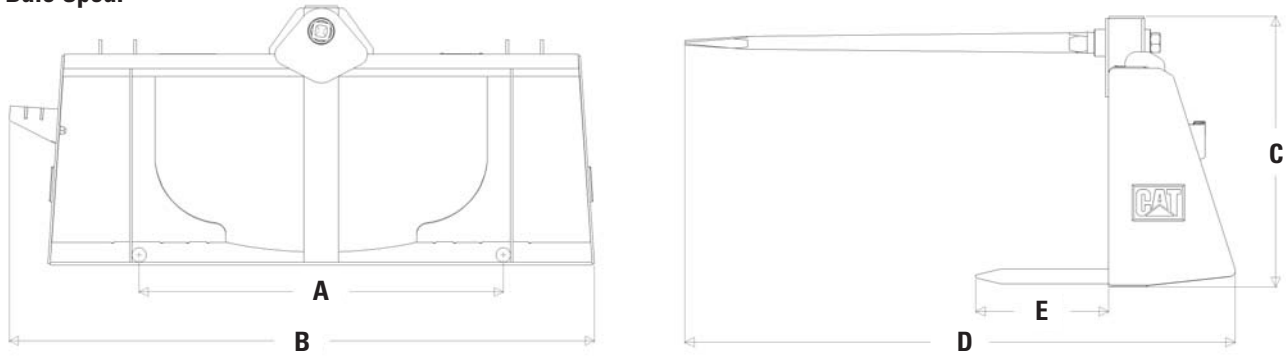

### Dual Bale Spear

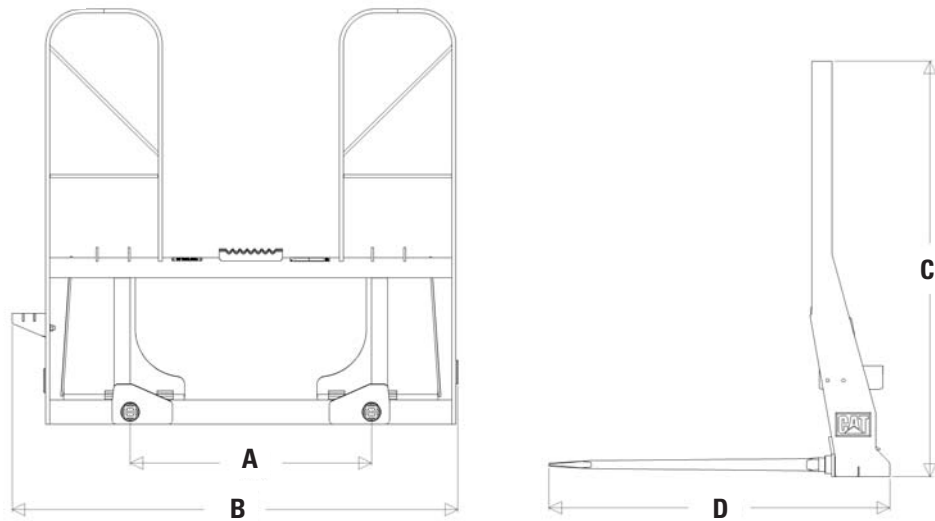

	Single Bale Spear				Dual Bale Spear					
			990 mm (39 in)	1245 mm (49 in)	990 mm (39 in)	1245 mm (49 in)				
<b>A</b> Tine spacing	mm	(in)	800	(31)	800	(31)	720	(28)	720	(28)
<b>B</b> Overall width	mm	(in)	1285	(51)	1285	(51)	1407	(55)	1407	(55)
<b>C</b> Overall height	mm	(in)	570	(22)	570	(22)	1315	(52)	1315	(52)
<b>D</b> Overall depth	mm	(in)	1186	(47)	1443	(57)	1100	(43)	1347	(53)
<b>E</b> Stabilizer tine length	mm	(in)	281	(11)	281	(11)	N/A	N/A	N/A	N/A
Weight	kg	(lb)	70	(154)	72	(158)	118	(260)	121	(266)
Capacity	kg	(lb)	909	(2,000)	909	(2,000)	1364	(3,000)	1364	(3,000)

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

AEHQ7724 (10-2015)

© 2015 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

